


LEVELING AND STABILIZATION

NOTE: Part numbers are shown for identification purposes only. Not all parts are available for individual sale. All parts with a link to the Lippert Store can be purchased.

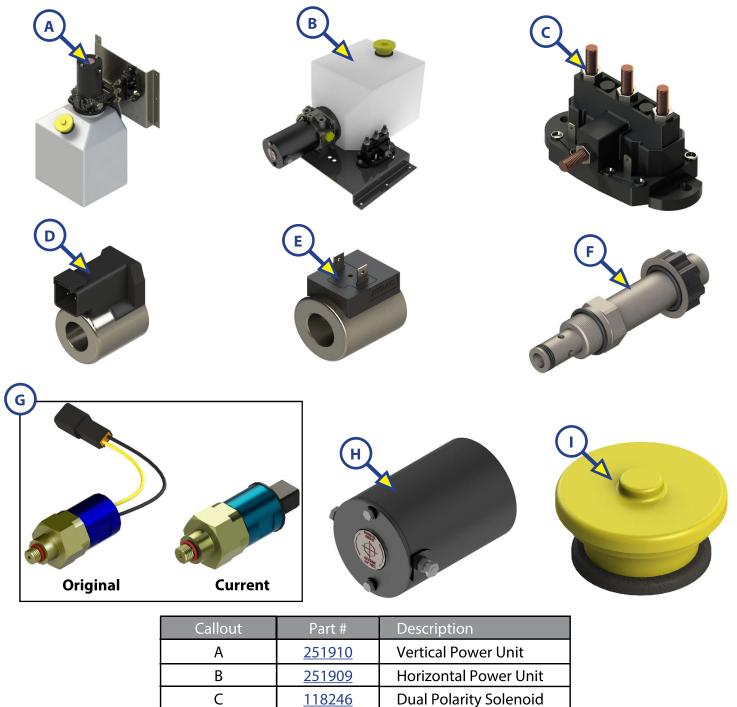

Deutsch Coil

Cartridge Valve

Pressure Switch

Power Unit Motor

Spade Coil

Fill Cap

174184

176954

177094

142927

<u>167576</u>

157505

D

Е

F


G


Н


L



LEVELING AND STABILIZATION

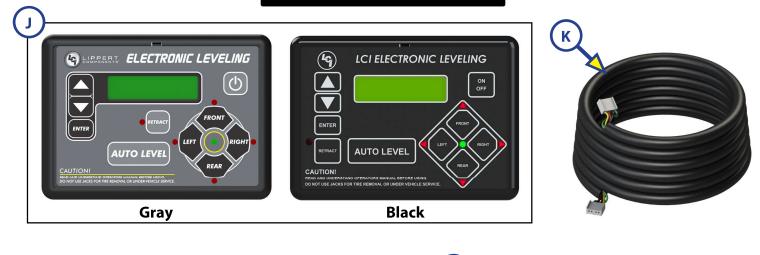










Callout	Part #	Description	
J	<u>421484</u>	LCD Touch Pad (Gray)	
	234802	LCD Touch Pad (Black)	
К	241316 Touch Pad Harness		
L	<u>237855</u>	Deutsch 2 Wire Pigtail Harness	
М	241129	Controller	
N	*135461	80 Amp 12V Breaker	
0	<u>241318</u>	Controller Harness	
*Circuit Protection requirement is 50 amps to 100 amps as needed by RVIA standards and OEM requirements.			



LEVELING AND STABILIZATION

<u>8K Jacks</u>

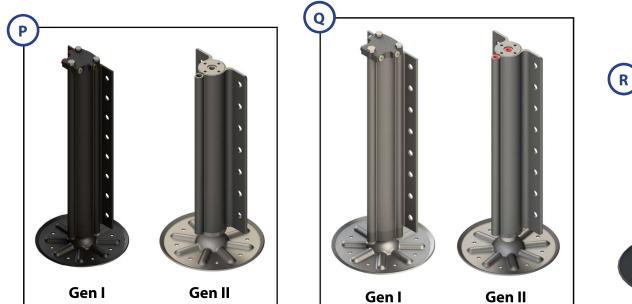



Callout	Part #	Description
Р	<u>336066</u>	Mini 8K Jack (Gen I)
	<u>708459</u>	Mini 8K Jack (Gen II)
Q	<u>195860</u>	8K Jack, 8 Hole Black (Gen I)
	<u>372892</u>	8K Jack, 8 Hole Black (Gen II)
	1958604	8K Jack, 8 Hole Silver (Gen I)
	<u>3728923</u>	8K Jack, 8 Hole Silver (Gen II)
R	<u>433458</u>	8K Jack, 13 Hole Black (Gen I)
	<u>43345810</u>	8K Jack, 13 Hole Silver (Gen I)



NOTE: A second O-Ring seal needs to be used above the footpad to secure kit. Rev: 09.18.23 Web: - <u>https://support.lci1.com/documentation/</u> - Ph: 432-LIPPERT (432-547-7378) - Email: <u>customerservice@lci1.com</u>

Footpad Bushing .64 ID

Hex Bolt, 5/8" - 18 x 1 1/2"

2020132523

139446


AC

AD

CCD-0002523




LEVELING AND STABILIZATION

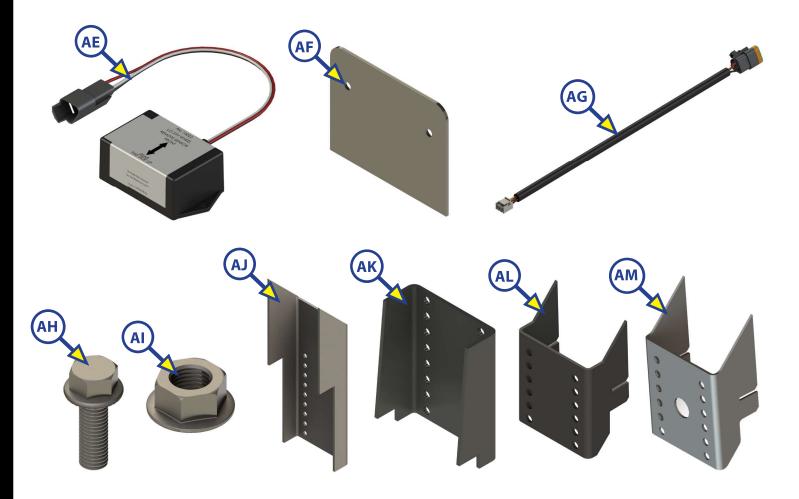

Callout	Part #	Description
AE	<u>232201</u>	Rear Sensor
AF	<u>231775</u>	Rear Sensor Mounting Plate
AG	<u>241314</u>	Rear Sensor Harness
AH	<u>118076</u>	Bolt, 1⁄2" - 20 x 1 1⁄2"
AI	<u>178210</u>	Nut, 1⁄2" - 20
AJ	<u>134989</u>	Mount Bracket (Weld-On)
AK	<u>218210</u>	Front Mount Bracket (Weld-On)
AL	273426	Mount Bracket (OBSOLETE, Use <u>701404</u>)
AM	<u>701404</u>	Mount Bracket




LEVELING AND STABILIZATION

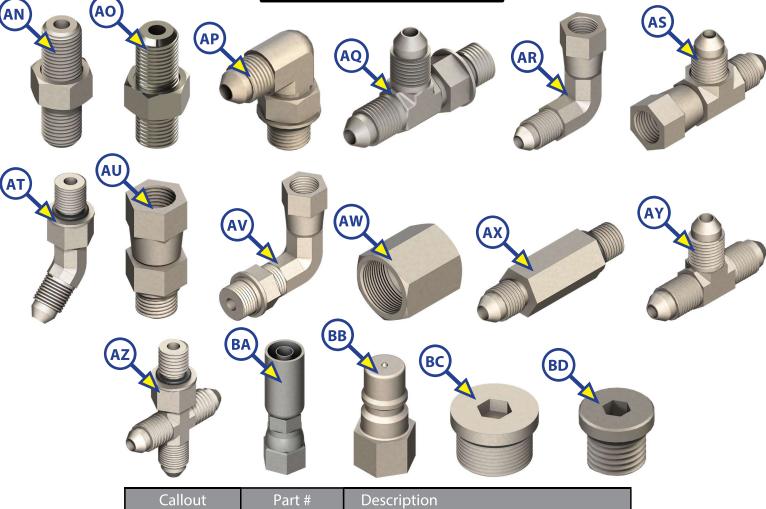

Callout	Part #	Description	
AN	<u>113042</u>	Hose Union Fitting	
AO	<u>113131</u>	Straight Fitting	
AP	<u>113128</u>	JIC to O-Ring 90 Degree Elbow Fitting	
AQ	<u>113130</u>	Run Tee Fitting	
AR	<u>113134</u>	Swivel Elbow Fitting	
AS	<u>113135</u>	Swivel Run Tee Fitting	
AT	<u>113129</u>	45 Degree Elbow Fitting	
AU	<u>113133</u>	Swivel Straight Fitting	
AV	<u>141020</u>	Swivel Elbow Fitting	
AW	<u>216288</u>	Steel Cap Fitting	
AX	<u>139417</u>	Long Straight Fitting	
AY	138423	Union T-Fitting	
AZ	<u>136225</u>	Cross Fitting	
BA	<u>138416</u>	Hose Coupling	
BB	<u>140457</u>	Quick Disconnect	
BC	<u>141323</u>	Hex Plug	
BD	<u>140998</u>	Hollow Hex Plug	

Rev: 09.18.23 Web: - https://support.lci1.com/documentation/ - Ph: 432-LIPPERT (432-547-7378) - Email: customerservice@lci1.com CCD-0002523

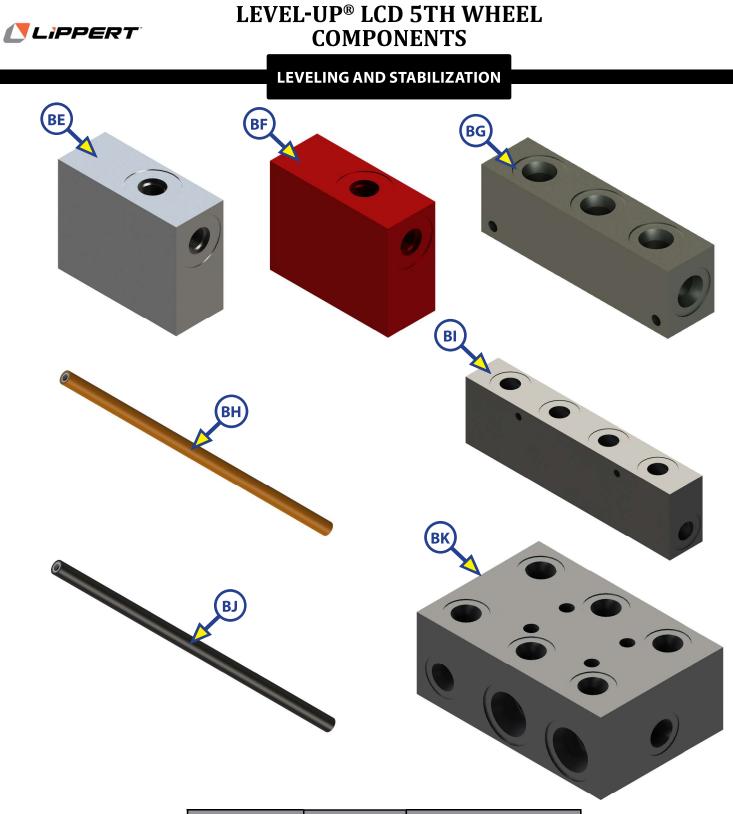

Callout	Part #	Description
BE	<u>138420</u>	Manifold
BF	<u>138421</u>	Restricted Manifold
BG	<u>166078</u>	Retract Valve Block
BH	<u>248654</u>	Orange Hose
BI	<u>194712</u>	Extend Valve Block
BJ	<u>248653</u>	Black Hose
BK	<u>255130</u>	4-Bank Manifold